


# Smart Light Switch User Manual



The new designed glass panel wireless touch smart switch is designed with Wi-Fi+RF to replace traditional switches as a variety of ways to control. Now one new switch can be added multi-control association to other switches with the backlight on the Smart Life App. Log on the app with the backlight on/off and relay status. The switch has the best value, a suitable for sound on and off, no button operations before operation and long press for the fourth time until the switch or 4 seconds and long press for the fourth time until the switch deep sounds as Di-Di for 2 times for successful operation.

## Safety Information

Risk of Electric Shock: Electricity can cause personal injury and property damage if handled improperly. If you are not sure about any part of these instructions, please seek professional assistance from a qualified electrician.

### Technical Parameters

Model: WS-EU-RF / WS-US-RF  
Working voltage: 100-240V AC, 50Hz/60Hz  
Max. total current: 10A (pure resistive load)  
2.5A (inductive and capacitive load)  
Max. Load Power depends on voltage  
Working temperature: 0°C-40°C  
Support system: Android/iOS

### Warnings

1. Turn off the power at the circuit breaker and test that power is off before wiring.

- Registration or Log in
- Download "Smart Life" Application

Enter the Register/Login interface to "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

- Configure the APP to the switch

Preparation: Ensure the switch has been connected with electricity. Ensure your phone has been connected to Wi-Fi and is able to connect to the internet.

### Note

The switch only supports 2.4G network. If you have connected 5G network, please disconnect 5G network firstly and connect 2.4G network.

- Wi-Fi link method:

Pair and clear up the Wi-Fi code (New Updated)  
1. Make sure your phone is connected to Wi-Fi and Bluetooth.



2. Open Smart Life App and Click "+", then the prompt page will automatically show on the screen. Click "Go to add".



- Select the device you want to add and click "Add".



How to reset/repair Wi-Fi code  
Press the switch button for 6 times and hold on the 6th time, then release until you hear Di-Di-Di(3 times) and the blue indicator on the switch will flash fast after 3 seconds. Reset/repair is successful.

- Remote radio frequency (RF) link method:

7. If you want to add another third or more smart switches to control your light, just repeat the steps above. And you will see the result as below when you associate another new switch.



One key switch  
Main Switch  
Associated 1  
Associated 2

Start button  
Start button  
Associated 2

## Set your Echo speaker by Alexa APP

- If you have finished installing Smart Life App, just open Amazon Alexa App and log into your Alexa account with password.

- Click the menu on the top left - click "settings" - choose "Set up a new device" (choose a device like Echo).



### Note

When below page appears, just press the small dot on your Echo device until the light turns to yellow. Then click "Continue on the App".  
Attention: The mobile phone can not open a variety of VPN software.

- Choose your own Wi-Fi and wait for a few minutes. After watching an introduction video, click "next step". Then it will enter Home page automatically. Now the Echo has been connected to Wi-Fi successfully.

## Enter Smart Life Skill in Alexa APP

Choose "Skills" in the options bar, and then search "Smart Life" in the input box.




- Turn off the power at the circuit breaker and use the electrical tester if the power is off, and then pull the existing switch out of the wall. Connect the wires to the switch. One gang switch as below by entering into the next operation.
- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

## Pair and clear up the RF code


- How to pair the RF code  
1.1 (Can be turned on and off): Confirm your switch is off before operations. Press the switch button for about 8 seconds until you hear Di-Di(2 times). Then the matching of RF codes is successful. The key of the remote controller can control the switching of the state of the switch on and off corresponding to the position of the switch.
- 2 (Open only): Confirm your switch is off before operations. Press the switch button for about 5 seconds until you hear Di(1 time). After that, press the switch button for about 5 seconds until you hear Di(1 time). The key of the remote controller can control the corresponding position of the switch to be open.
- 3 (Close only): Confirm your switch is on before operations. Press the switch button for about 5 seconds until you hear Di(1 time). After that, press the switch button for about 5 seconds until you hear Di(1 time). The key of the remote controller can control the corresponding position of the switch to be closed.

- How to clear up the RF code  
Confirm your switch is off before operations. Press the switch button for a long time until you hear Di-Di-Di(4 times), and then release the button. The RF code is now cleared up.
- How to achieve multi-control association  
Note: Please confirm you have successfully finished the Wi-Fi link method above for adding the switch to your Smart Life App before the association.
- 1 Wi-Fi add another smart switch to the same Smart Life App. If there is a smart switch having been added before to the app, just go to next step. Note: There is no need to wire the new added switch to the light, only L and N are required for wiring.

- Click "+" in the upper right corner and choose "Multi-Control Association", and then click "+" in the right corner.



Extension: Back to previous page, you will see two items in the page. One is your main switch, the other is the one you associate just now.  
Note: Please confirm the associated switch is enabled.



Thank you for your support and purchase at we MoesGo, we are always here for your complete satisfaction. Just feel free to share your great shopping experience with us.




If you have any other need, please do not hesitate to contact us first. We will try to meet your demand.  
Support: service@moesgo.com

WENZHOU NOVA NEW ENERGY CO., LTD.  
Address: Power Science and Technology Innovation Center,  
NO.238, Wei 11 Road, Yueqing Economic Development Zone,  
Yueqing, Zhejiang, China  
Tel: +86-577-5718615  
Email: service@moesgo.com


AMZLAB GmbH  
Lubenwerder 23, 45326 Essen  
Made in China

## Step 2

- Remove the existing wall plate; turn on the power at the circuit breaker and use an electrical tester to check which wire is line wire; the tester will flash and or chirp when it comes close to a line wire.

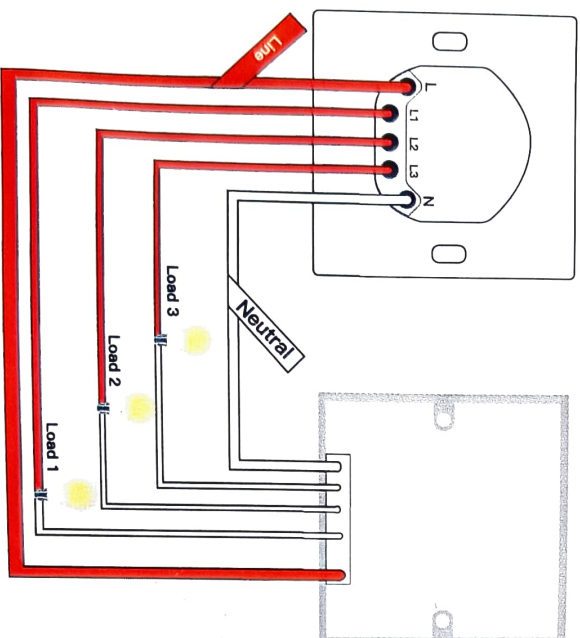

- Turn off the power at the circuit breaker and use the electrical tester if the power is off, and then pull the existing switch out; label the line wire and other wires; disconnect the wires from the existing switch with pliers.
- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

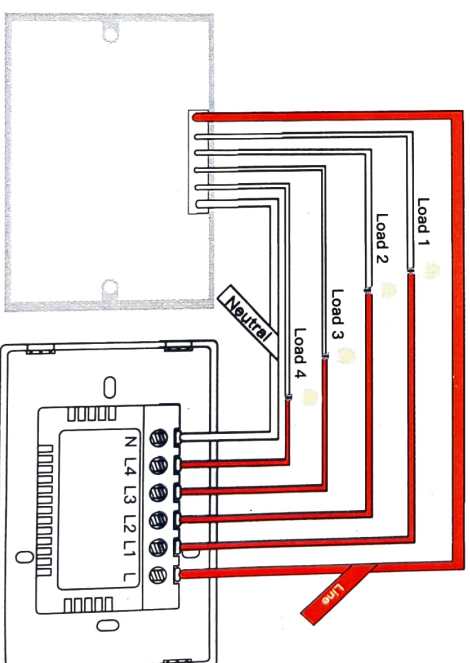

## Step 3

- Mount the switch with the provided screws and snap the wall plate on it.

## Step 4

- Turn the power back on at the circuit breaker and then switch the light on.

## Add Devices

### 1 Download Smart Life App



Please scan the QR code or download Smart Life on App store.