


1 mod din central test unit




The Central Test Unit is designed to test the Emergency Lighting Systems' battery pack, by disconnecting the mains power supply to the system. Operators can select between three timing options, depending on individual requirements.

Test Initiation:

- A. Select the desired timing range by sliding the selector switch to one of the three time options, 3hrs, test (5 secs) or 30 mins.
- B. Press and hold the set button for 2 seconds. The LED corresponding to the selected time will become illuminated steady.
- C. After 2 seconds, output is energised and the LED will pulse indicating that a test is in progress.
- D. After the selected time has elapsed the LED will again become illuminated steady.

Testing can only be terminated by removing the power. When the power is reapplied only the green LED is illuminated.

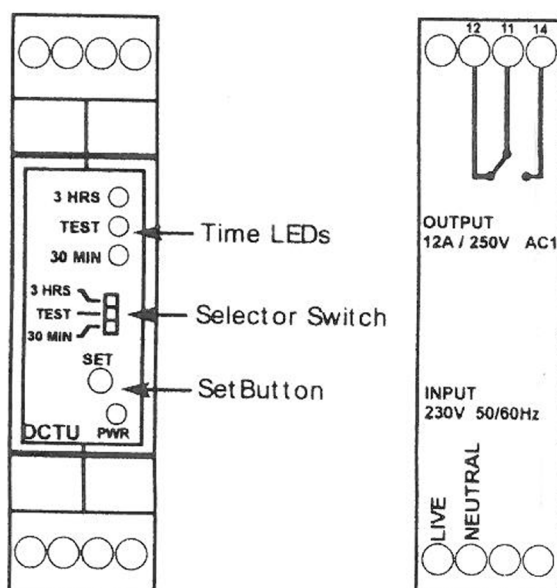

TECHNICAL DATA

- Supply Input: 230 Volts AC - 50/60 Hz
- Contact Rating: 12A / 250VV AC (AC1)
- Test Time Ranges: 3hours; Test (5 secs); 30 minutes.