

Lucy HRC**Insulated House Service Cutouts**

Maximum rating
60 and 100 amperes
415 volts

Type MC 60 NPC – 60 amp. rating

List Number	Type Number	Maximum Size of Cable in mm ²	
		At top	At bottom
2036/G	MC 60 NPC	1—25	1—25
2036/R	MC 60 NPC	1—25	2—25
2036/Q	MC 60 NPC	2—25	1—25
2036/E	MC 60 NPC	2—25	2—25
2036/C	MC 60 NPC	1—35	1—35
2036/L	MC 60 NPC	1—35	2—35
2036/J	MC 60 NPC	2—35	1—35
2036/A	MC 60 NPC	2—35	2—35

Fuse-link type RH

Type MC 100 NPC – 100 amp. rating

2036/H	MC 100 NPC	1—25	1—25
2036/M	MC 100 NPC	1—25	2—25
2038/K	MC 100 NPC	2—25	1—25
2036/F	MC 100 NPC	2—25	2—25
2036/D	MC 100 NPC	1—35	1—35
2036/P	MC 100 NPC	1—35	2—35
2036/N	MC 100 NPC	2—35	1—35
2036/B	MC 100 NPC	2—35	2—35

Fuse-link type RHL

Dimensions

Height 156 mm Width 86 mm Depth 79 mm

Type MC 60 XE – 60 amp. rating

2021/F	MC 60 XE	1—25	1—25
2021/G	MC 60 XE	1—25	2—25
2021/H	MC 60 XE	2—25	1—25
2021/E	MC 60 XE	2—25	2—25
2021/B	MC 60 XE	1—35	1—35
2021/C	MC 60 XE	1—35	2—35
2021/D	MC 60 XE	2—35	1—35
2021/A	MC 60 XE	2—35	2—35

Fuse-link type RH

Type MC 100 XE – 100 amp. rating

2021/P	MC 100 XE	1—25	1—25
2021/Q	MC 100 XE	1—25	2—25
2021/R	MC 100 XE	2—25	1—25
2021/N	MC 100 XE	2—25	2—25
2021/K	MC 100 XE	1—35	1—35
2021/L	MC 100 XE	1—35	2—35
2021/M	MC 100 XE	2—35	1—35
2021/J	MC 100 XE	2—35	2—35

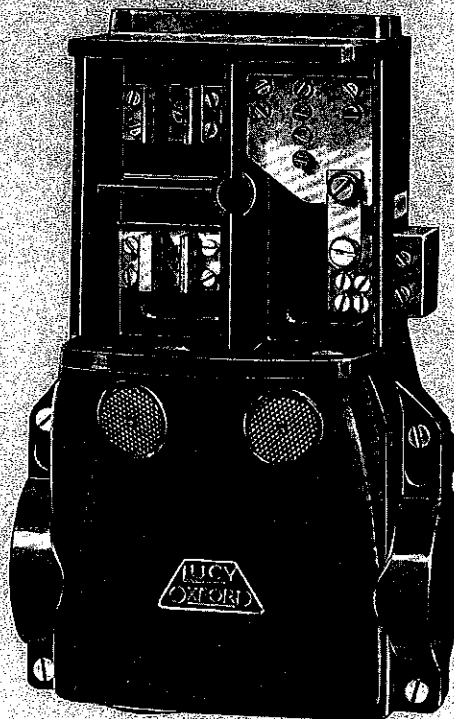
Fuse-link type RHL

Dimensions

Height 187 mm Width 117 mm Depth 79 mm

Types MC 60 NPC and MC 100 NPC

Types MC 60 XE and MC 100 XE

Single pole and neutral
with integral earth block

A Cutout available with four entry sealing chamber, type XE, or with a four entry cable cover and for use with PVC concentric or paper insulated service cables. The earth terminal block is normally arranged for two incoming 16 mm² conductors and one or three outgoing consumers 16 mm² connections. The protective multiple earth link is only fitted when specifically ordered.

For details of fuse-links see page 19