

MK Electric

Sentry Circuit Protection Solutions





The Sentry range of Consumer Units from MK Electric has been stylishly designed to blend in with its environment. The curved lines and slim-line appearance mean it won't look out of place when installed in hallways, lounges or kitchens of new properties. The range expanded includes a 21-module unit for larger installations and also a 4-module unit to cater for small one-off installations and extensions to existing ones.

The MK Electric Design Service offers a pre-assembly service for custom built boards with all devices fitted, busbars cut and fitted with devices, live and neutral cables terminated. This service is available across the entire range of Metal, Insulated, Flush and Skeleton units.

Supports 17th Edition Compliance

Full range of products to support compliance with the 17th Edition of the Wiring Regulations including RCBOs and pre-assembled split load boards with a variety of RCD configurations

Sentry Skeleton Boards for social housing

For use in a Mantel or Clifton type enclosure, a complete offering of blank and pre-configured skeleton units for use in buildings with multi-occupancy dwellings

MK Electric Design Service for pre-assembled Consumer Units

Save time and money by specifying project requirements through the MK Electric Design Service. Pre-assembled custom built boards, with all devices pre-fitted with busbars and cables are available to suit any installation. Available across the entire range of Metal, Insulated, Flush and Skeleton units

Flush mounting versions

Flush mounting available for even neater installations

Protective lid

Opaque and downward opening lid conceals protective devices and labelling

Floating busbar system

Gives maximum installation flexibility

Broad selection of pre-assembled split load units available


Suits a variety of applications and saves installation time

Stacking options

For larger installations dual rail 24, 32 and 42 module units possible in both insulated and metal

Features and benefits

MK Sentry Consumer Unit

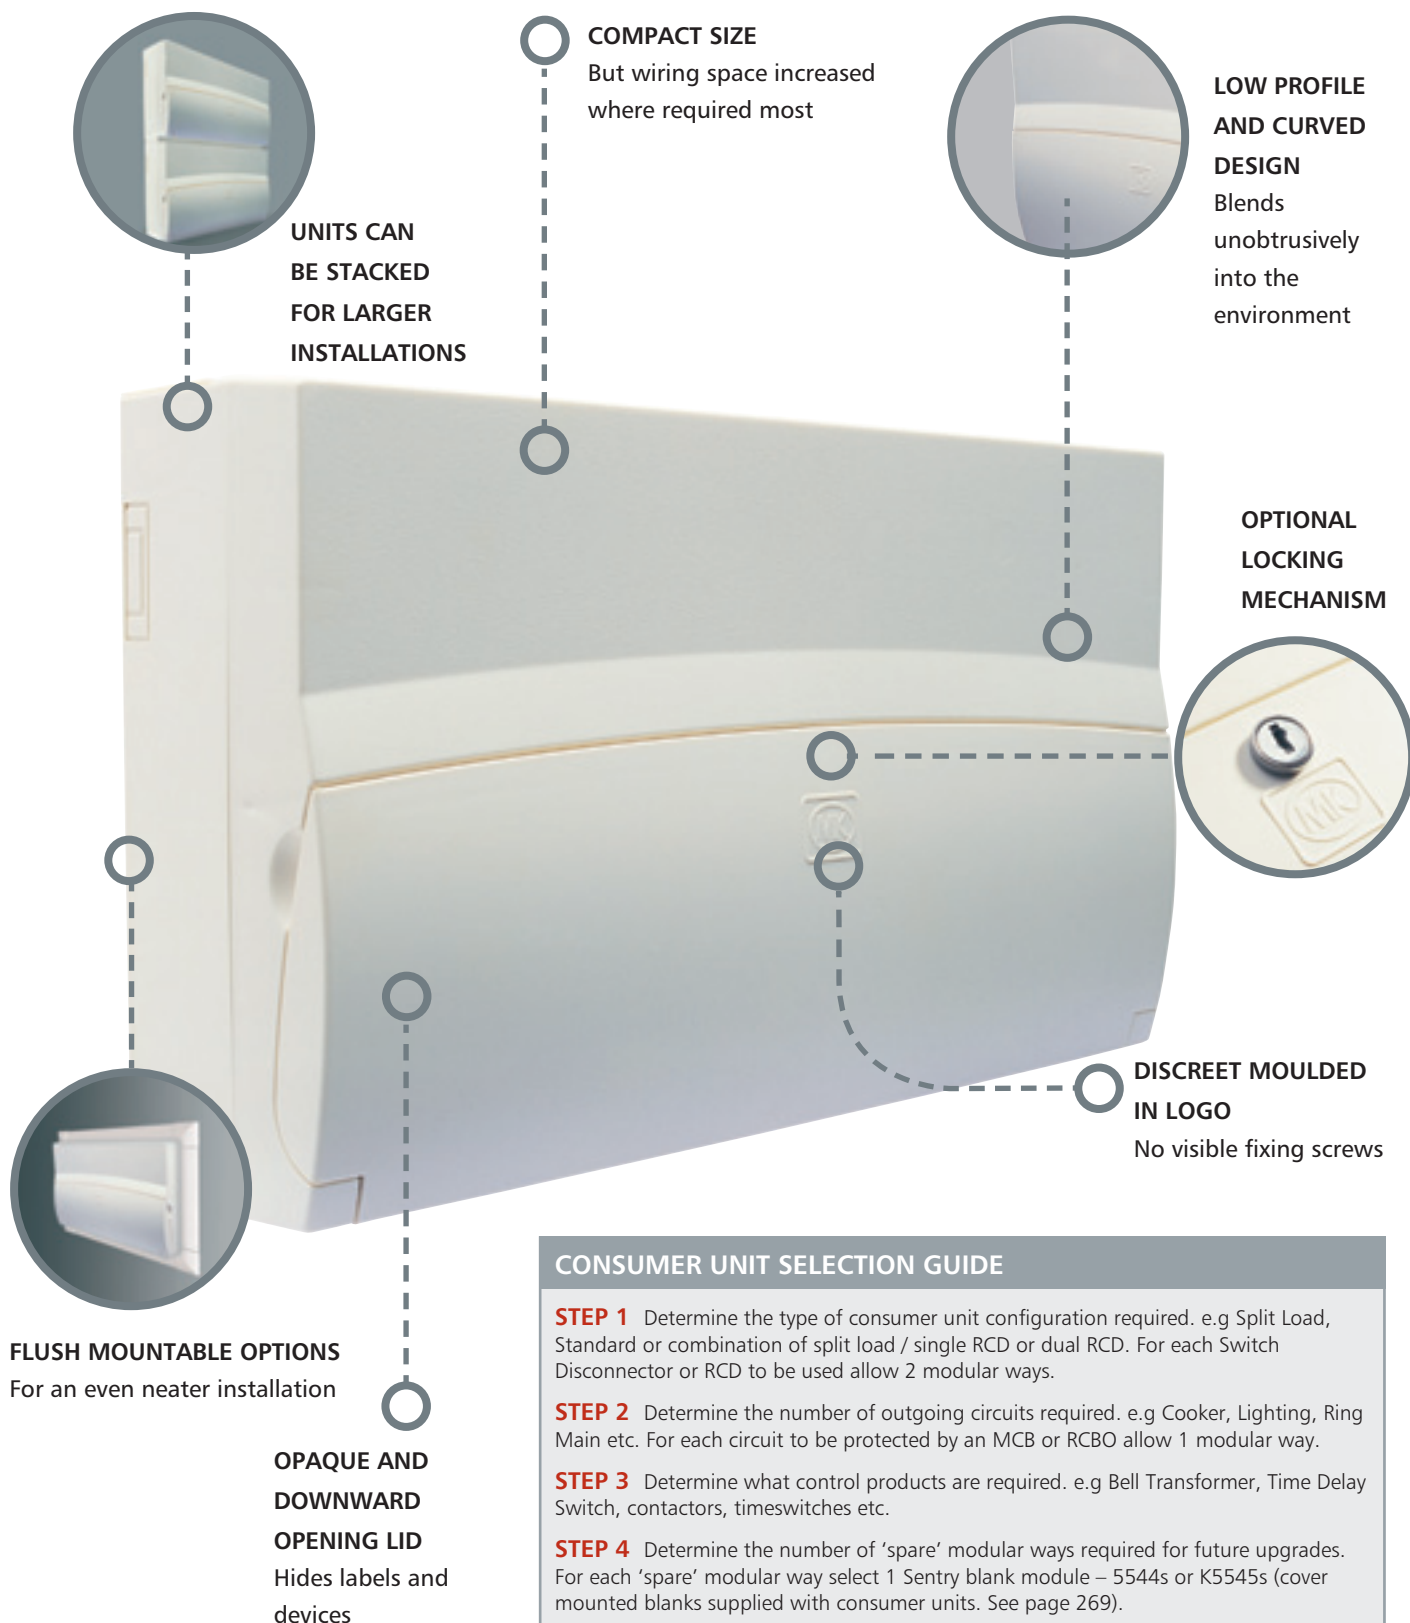

CONSUMER UNIT SELECTION GUIDE

STEP 1 Determine the type of consumer unit configuration required. e.g Split Load, Standard or combination of split load / single RCD or dual RCD. For each Switch Disconnector or RCD to be used allow 2 modular ways.

STEP 2 Determine the number of outgoing circuits required. e.g Cooker, Lighting, Ring Main etc. For each circuit to be protected by an MCB or RCBO allow 1 modular way.

STEP 3 Determine what control products are required. e.g Bell Transformer, Time Delay Switch, contactors, timeswitches etc.

STEP 4 Determine the number of 'spare' modular ways required for future upgrades. For each 'spare' modular way select 1 Sentry blank module – 5544s or K5545s (cover mounted blanks supplied with consumer units. See page 269).

STEP 5 Now add together the total number of modular ways required.

STEP 6 Select from our range of Insulated, Metal, Flush or stacked consumer units (using standard consumer units plus stacking kits). Choose the type and size most appropriate for your requirements.



FLEXIBLE NEUTRAL BAR CONFIGURATION

Enables installer to select a wide combination of protected and unprotected circuits



BACKED OUT AND CAPTIVE COMBI-HEAD SCREWS


Allows speedy installation

COLOUR CODED EARTH AND NEUTRAL TERMINAL LOCATED AT TOP OF UNIT FOR EASE OF WIRING




AMPLE 360° KNOCK-OUTS FOR CABLE ROUTING

Open cable entry at rear plus optional rear knock-outs

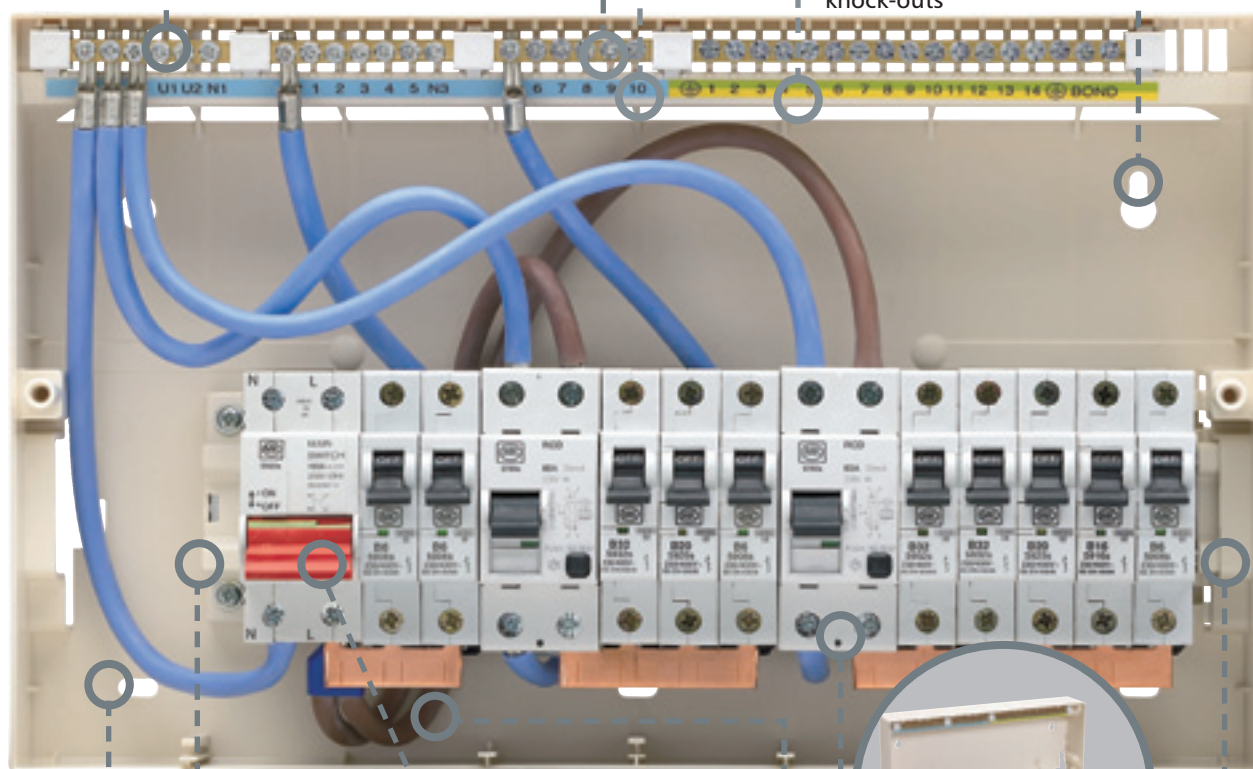

OFFSET INCOMER

Provides additional wiring space making mains input connections easier



TRIPOD FIXING HOLES

Allow tripod fixing to cope with uneven surfaces. Hole locations allow access for cordless drills and power drivers


AMPLE WIRING SPACE

RAISED DIN-RAIL

For improved cable routing

FLOATING BUSBAR SYSTEM

For maximum installation flexibility including acceptance of control modules



EASILY REMOVABLE DIN-RAIL

Improves first fix

STACKING OPTIONS AVAILABLE

For 12, 16 & 21 Module Units ideal for larger applications, or where space may be limited

The MK Electric Design Service


The MK Design Service is perfect for when only a customised solution can meet your requirements, or when fully assembled Consumer Units can be provided for your project to save you installation time.

Our dedicated team can help you to build the best configurations for your project, and then assemble the boards ready for installation. The service is available for all MK Consumer Units – Metalclad, Insulated, Flush and Skeleton. Using standard and non-standard Sentry components we can build and supply fully assembled units to an agreed design. For example, have your split load boards supplied with all the devices pre-fitted with busbars and cables to suit the installation. This service is ideal for housing developers, or any application requiring typically more than twenty units.

- Dedicated team on hand to build configuration to meet your needs
- Service is available for all MK Consumer Units and Skeleton Units
- Ideal for housing developments, or any application requiring typically more than 20 units
- Faster installation time on site
- Fast turnaround – 1 working day response time to initial enquiry

For more information call the MK Electric Technical Services Team on 01268 563720 or visit the website at www.mkelectric.co.uk and follow the links to the Design Service.

STEP 1	Call the MK Electric Technical Services Team on 01268 563720 or visit www.mkelectric.co.uk and follow the links to the Design Service
STEP 2	Discuss the details of your project and Circuit Protection requirements with a member of the MK Technical Services Team or complete the online enquiry and click send
STEP 3	Within one working day you will have a response to your initial enquiry
STEP 4	Confirm the configurations and quantities
STEP 5	Receive the quote for your order
STEP 6	Place your order with your wholesaler
STEP 7	Your order will be delivered to the wholesaler of your choice. All boards will be fully assembled and ready for installation

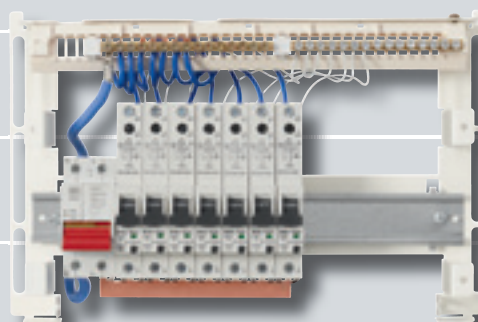

Features and benefits


MK Sentry Skeleton Unit



FLEXIBLE NEUTRAL BAR CONFIGURATION


Enables a wide combination of protected and unprotected circuits

SUITABLE FOR USE IN MOST MANTEL AND CLIFTON TYPE ENCLOSURES



BACKED OUT AND CAPTIVE COMBI-HEAD SCREWS

Quick and easy to install




ELONGATED FIXING SLOTS

Allows easy positioning of the unit within the enclosure

RAISED TERMINAL BAR

Allows easier wiring of devices into the terminals

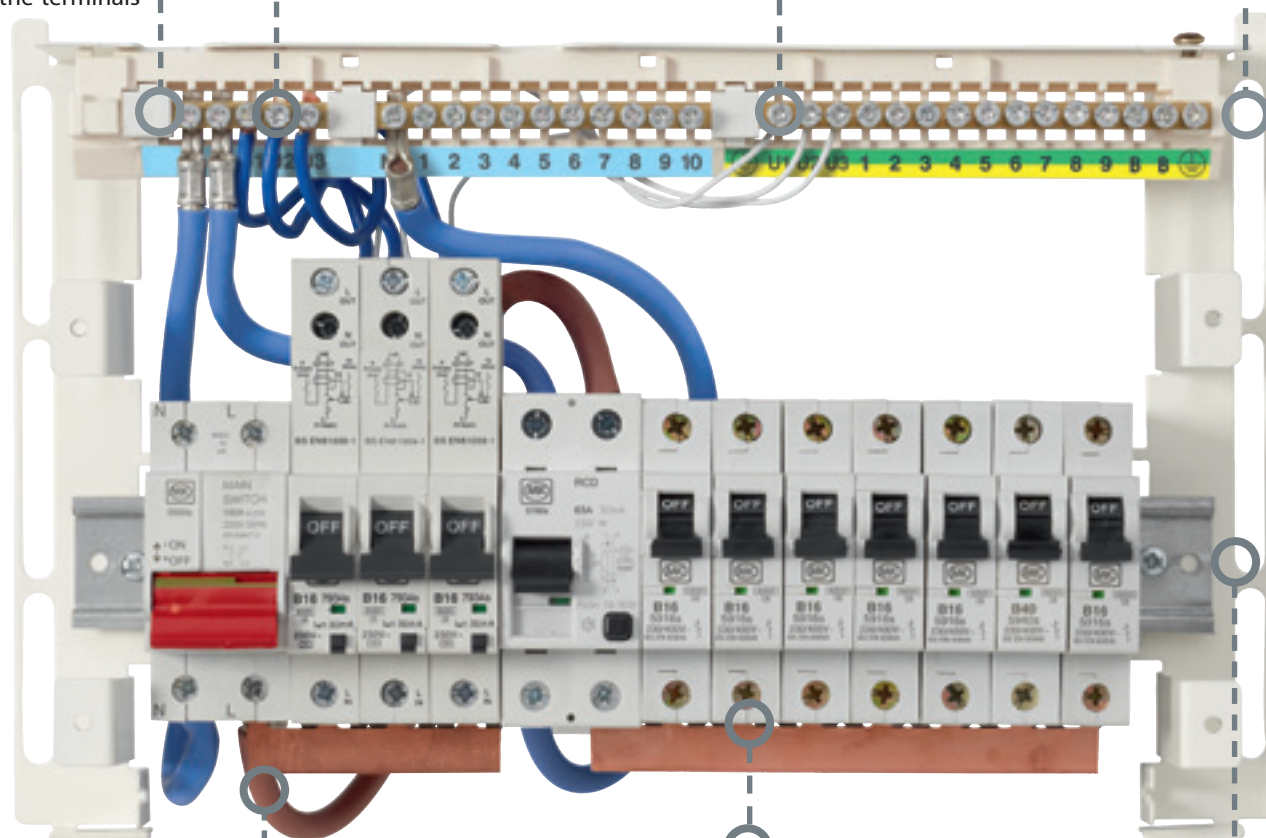

FLOATING BUSBAR SYSTEM

Busbar can be cut according to devices fitted

AMPLE WIRING SPACE

Quick and easy to install

EASILY REMOVABLE DIN-RAIL

Improves first fix

[illegible]



Dual RCD Protection, with some independent circuits

Dual RCD boards with MCB's and RCBOs give both general and essential protection. The configurations shown include a Switch and 2 RCDs, with a further 10 and 15 ways respectively.

K5681S MAG 17ED



Consumer unit options

Insulated	Metal	Number of available ways
K5666s	K5566s	10
K5686s	K5586s	10
K5681s	K5581s	15
K5683s	K5583s	15

Some Examples of 10 way Configurations

SWITCH	RCBO	RCD	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB	MCB
	Smoke Alarm		Cooker	Kitchen Sockets	Upstairs Sockets	Down Stairs Lights	Under-Floor Heating		Shower	Down Stairs Sockets	Up Stairs Lights	Immersion Heater

SWITCH	RCBO	RCBO	RCD	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB
--------	------	------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

SWITCH	RCD	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB	MCB	MCB
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Some Examples of 15 way Configurations

SWITCH	RCBO	RCBO	RCD	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB	MCB
	Smoke Alarm	Burglar Alarm		Shower	Upstairs Sockets	Kitchen Sockets	Outside Sockets	Down stairs Lights	Garage	Immersion Heater			Cooker	Down stairs Sockets	Upstairs Lights	Outside Sockets

SWITCH	RCBO	RCD	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB
--------	------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

SWITCH	RCD	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	MCB	RCD	MCB	MCB	MCB	MCB
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

These are some examples of Standard, Neutral and Earth bar configurations. Additional labelling is included in the box to allow for further alternatives

Selection Chart

Switch
Disconnecter

MCB
Single
Pole
Type B

Type C

RCBO
with Solid
Neutral
Type B

30mA

RCD
110V
Double
Pole

10mA

30mA

RCD
230V
Double
Pole

10mA

30mA

MODULES

TWO

ONE

ONE

ONE

TWO

TWO

TWO

TWO

RATING



5903s

8703s

7932s

5906s

8706s

5910s

8710s

7933s

5916s

8716s

7934s

6016s

6416s

6316s

5716s

5920s

8720s

7935s

5932s

8732s

7936s

6032s

6730s

5940s

8740s

7937s

5740s

5945s

7938s

5950s

8750s

7939s

5560s

5760s

5780s

7700s

5500s

SPLIT-LOAD CONFIGURATION

A full range of pre-assembled units are available, however if they do not fit your requirements, Sentry Consumer units can be configured to numerous split-load or multi-incomer configurations, by cutting the floating busbar and removing the 'U' links between the terminal bars.

The maximum number of switched or RCD ways available to a Consumer unit is dependent on the neutral terminal bar arrangement. eg. K5621s can become a split-load board by removing one 'U' link between neutral bars and having up to 14 ways switched and up to 3 ways protected by the RCD, or up to 17 ways protected and up to 3 ways switched.

TERMINAL BAR CONFIGURATION


	Modules Empty	Earth Terminals		Neutral Terminals		Total Ways	Unprotected	RCD1	RCD2	RCD3
		Circuits	Bond	Total	Separate Blocks					
K5604s	4	4	1	4	1	2	2	n/a	n/a	n/a
K5608s	8	8	2	8	1	6	6	n/a	n/a	n/a
K5612s	12	12	3	15	6 + 9	8	3 or 10*	8	n/a	n/a
K5616s	16	14	3	19	6 + 7 + 6	16	2 or 7 or 14*	5	5	n/a
K5621s	21	18	3	27	7 + 7 + 7 + 6	21	2 or 17 or 18*	5	5	3
K5504s	4	4	1	4	1	2	2	n/a	n/a	n/a
K5508s K6508s	8	8	2	8	1	6	6	n/a	n/a	n/a
K5512s K6512s	12	12	3	15	6 + 9	8	3 or 10*	8	n/a	n/a
K5516s K6516s	16	14	3	19	6 + 7 + 6	16	2 or 7 or 14*	5	5	n/a
K5521s K6521s	21	18	3	27	7 + 7 + 7 + 6	21	2 or 17 or 18*	5	5	3

* Dependant on RCDs fitted

Note: Additional Terminal labels supplied on main sheet to support alternative terminal configurations





		RCD Pulsating DC Fault Current Sensitive		RCD Time Delayed 230V Double Pole		RCD 230/400V Four Pole		Note: Only suitable as standalone devices, in Sentry four module enclosures and Commando Combi				
100mA	300mA	10mA	30mA	100mA	30mA	100mA	300mA					
TWO	TWO	TWO	TWO	TWO	FOUR	FOUR	FOUR					
								RATING				
								3A				
								6A				
								10A				
		6216s	6716s					16A				
								20A				
				6425s				25A				
		6630s						32A				
		5640s		6440s		6240s	40A					
								45A				
								50A				
6160s	5860s	5660s		6463s		6363s	6263s	63A				
6180s	5880s			6980s					80A			
6600s	7800s			6400s					100A			

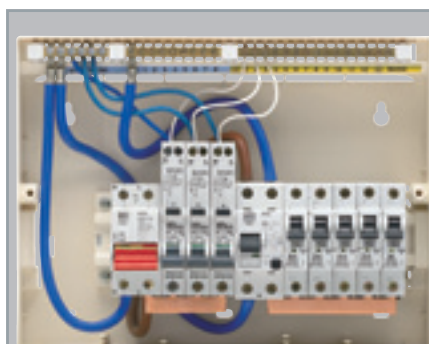

TO BUILD A SPLIT LOAD RCD CONSUMER UNIT WITH RCBOs e.g. 3+5 split-load

Requires:


- K5612s** Insulated Consumer Unit, 12 Mod
 - K5563s** Split Load Cable Kit
 - 5500s** Switch Disconnecter
 - 5780s** RCD, 80A 30mA
- Select up to 3 RCBOs and 5 MCBs.

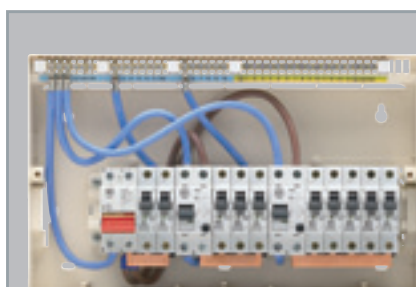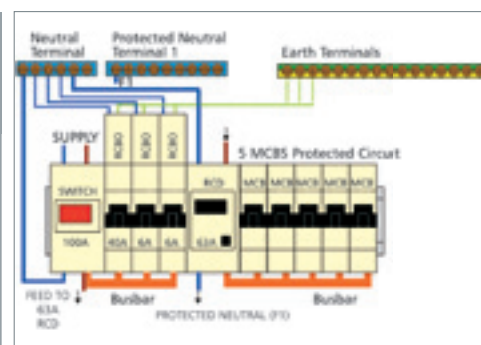

TO BUILD A DUAL RCD CONSUMER UNIT e.g. 2 + 3 + 5 split-load

Requires:

- K5616s** Insulated Consumer Unit, 12 Mod
 - K5568s** Split Load Cable Kit twin RCD arrangement
 - 5500s** Switch Disconnecter
 - 5780s** RCD, 80A 30mA
 - 5760s** RCD, 63A 30mA
- Select up to 10 MCBs.

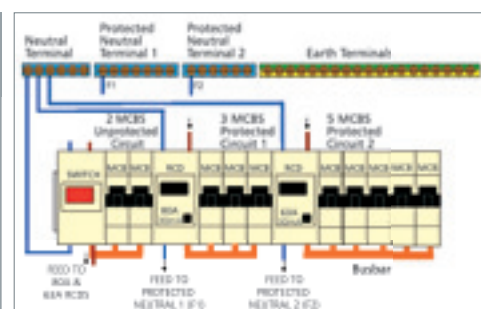


Consumer Units


METAL SURFACE



K5504s



K5508s



K5512s



K5516s



K5521s

K5504s

ACCEPTS 4
ONE MODULE PRODUCTS
(1 INTEGRAL NEUTRAL BAR)

K5508s

ACCEPTS 8
ONE MODULE PRODUCTS
(1 INTEGRAL NEUTRAL BAR)

All units are magnolia coloured.

All units feature an enclosure box of welded construction finished in a tough coating of polyester epoxy paint containing ample knockouts in top, bottom, side and rear surfaces.

The units have an impact resistant, flame retardant, thermoplastic cover and lid.

Dual rail units are available for the 12, 16 and 21 module units to enable single tariff and split load (up to 80A) using Stacking Kits K6061s, K6062s and K6063s respectively in between the units.

Degree of Protection to BS EN 60529 to IP2X C

Precautions must be taken to maintain the IP rating, e.g. use of cable glands and knockouts

BS EN 60439-3: 1999

1

K5512s

ACCEPTS 12
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

1

K5516s

ACCEPTS 16
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

1

K5521s

ACCEPTS 21
ONE MODULE PRODUCTS
(3 INTEGRAL NEUTRAL BARS
FITTED WITH LINKS)

1

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5504s:	140	x 230	x 110mm
K5508s:	234	x 230	x 110mm
K5512s:	306	x 230	x 110mm
K5516s:	378	x 230	x 110mm
K5521s:	468	x 230	x 110mm

Thickness of all Stacking Kits: 15mm

Main incomer maximum rating
K5604s and K5504s: 63A

All other consumer units: 100A


Cover mounted blanks are supplied with ALL consumer units
(2 off x 1 for 4, 8 and 12 module and
2 off x 2 for 16 and 21 module)

Stacking Kits

FOR METAL AND INSULATED CONSUMER UNITS



K6063s



K5561s

1

K6061s

SUITABLE FOR USE WITH
12 MODULE UNITS

1

K6062s

SUITABLE FOR USE WITH
16 MODULE UNITS

1

K6063s

SUITABLE FOR USE WITH
21 MODULE UNITS

1

K5561s

CABLE KIT FOR STACKED
SENTRY UNITS

1

DUAL RAIL UNITS CAN BE CREATED USING 12, 16 AND 21 MODULE UNITS AND THE APPROPRIATE STACKING KIT.

Ideal for large applications or if additional capacity is required or for dual tariff applications.

K6061s, K6062s, K6063s
Enables two consumer units to be stacked (joined together) to form one integral consumer unit. Includes frame nuts, bolts and earth cable (for bonding earth terminal bars together).

Knockout holes in the base and top of consumer units align, allowing cables to pass through easily.

K5561s
Includes 3 cables (2 neutral and 1 live) for use when electronically connecting the upper and lower units of a stacking assembly for either main incomer or split load arrangements.

This kit must be used to ensure compliance with BS EN 60439-3: 1999.




Assembly using a stacking kit




Consumer Units


INSULATED SURFACE



K5604s




K5608s



K5612s



K5616s



K5621s

K5604s

ACCEPTS 4
ONE MODULE PRODUCTS
(1 INTEGRAL NEUTRAL BAR)

K5608s

ACCEPTS 8
ONE MODULE PRODUCTS
(1 INTEGRAL NEUTRAL BAR)

All units are magnolia coloured.

All units feature a robust base together with an all over front cover and moulded lid in an impact resistant, flame retardant thermoplastic. Cable entry points are located on top, bottom, side and rear surfaces.

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5604s:	140 x	230 x	110mm
K5608s:	234 x	230 x	110mm
K5612s:	306 x	230 x	110mm
K5616s:	378 x	230 x	110mm
K5621s:	468 x	230 x	110mm

Main incomer maximum rating
K5604s and K5504s: 63A

All other consumer units: 100A

1

K5612s

ACCEPTS 12
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

1

K5616s

ACCEPTS 16
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

K5621s

ACCEPTS 21
ONE MODULE PRODUCTS
(3 INTEGRAL NEUTRAL BARS
FITTED WITH LINKS)

Degree of protection to BS EN 60529 to IP2XC.

Precautions must be taken to maintain the IP rating, e.g. use of cable glands and knockouts.

BS EN 60439-3: 1999

1

K6508s

ACCEPTS 8
ONE MODULE PRODUCTS
(1 INTEGRAL NEUTRAL BAR)

1

K6512s

ACCEPTS 12
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

1

All units feature a tough galvanised metal box for insertion into the wall cavity, which can be secured at the rear or panel-mounted using the brackets supplied. The DIN rail embodies a useful alignment adjusting mechanism to make for a speedy installation. The units have an impact resistant, flame retardant, thermoplastic cover, lid and a flush moulded frame is supplied to overlap the exposed cavity to produce a smooth line between unit and wall.

Degree of protection to BS EN 60529 to IP2XC.

Precautions must be taken to maintain the IP rating, e.g. use of cable glands and knockouts.

1

K6516s

ACCEPTS 16
ONE MODULE PRODUCTS
(2 INTEGRAL NEUTRAL BARS
FITTED WITH LINK)

1

K6521s

ACCEPTS 21
ONE MODULE PRODUCTS
(3 INTEGRAL NEUTRAL BARS
FITTED WITH LINKS)

1

BS EN 60439-3: 1999

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K6508s:	234 x	230 x	106.5mm
K6512s:	306 x	230 x	106.5mm
K6516s:	378 x	230 x	106.5mm
K6521s:	468 x	230 x	106.5mm

Flush frame adds 38mm per side to the unit

WALL CAVITY DIMENSIONS:

	WIDTH	HEIGHT	DEPTH (min)
K6508s:	245 x	235 x	67mm
K6512s:	315 x	235 x	67mm
K6516s:	390 x	235 x	67mm
K6521s:	480 x	235 x	67mm

Depth of flush consumer unit visible on wall: 50mm

FACTORY BUILT SERVICE
MK can save you time and money by pre-assembling Consumer units with your required Sentry components

Cover mounted blanks are supplied with ALL consumer units
(2 off x 1 for 4, 8 and 12 module and 2 off x 2 for 16 and 21 module)


Consumer Units

WITH SPLIT-LOAD SINGLE
RCD ARRANGEMENTS
METAL
SURFACE

WITH SPLIT-LOAD SINGLE
RCD ARRANGEMENTS
INSULATED
SURFACE




K5582s



K5566s



K5586s



K5581s



K5682s




K5662s



K5666s



K5686s



K5681s

K5582s

100A SWITCH DISCONNECTOR AND 63A 30mA RCD. ACCEPTS A FURTHER 8 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS BETWEEN 1/6 AND 6/1

K5566s

100A SWITCH DISCONNECTOR AND 63A 30mA RCD. ACCEPTS A FURTHER 12 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS BETWEEN 1/8 AND 8/1

All units are magnolia coloured.

All units are pre-fitted with a switch disconnecter and RCD together with all necessary split-load cabling. The flexibility of design allows the RCD to be positioned to suit the required configuration of RCD protected and non-protected circuits, subject to the rating of either the switch or RCD not being exceeded. MK recommends the use of RCBOs for non RCD protected circuits to comply with the 17th Edition of the Wiring Regulations.

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5582s:	306	x 230	x 110mm
K5566s:	378	x 230	x 110mm
K5586s:	378	x 230	x 110mm
K5581s:	468	x 230	x 110mm

K5586s

100A SWITCH DISCONNECTOR AND 80A 30mA RCD. ACCEPTS A FURTHER 12 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS BETWEEN 1/8 AND 8/1

K5581s

100A SWITCH DISCONNECTOR AND 80A 30mA RCD. ACCEPTS A FURTHER 17 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS BETWEEN 1/14 AND 14/1

Degree of Protection to

BS EN 60529 to IP2XC

Precautions must be taken to maintain the IP rating e.g. use of cable glands and knockouts

BS EN 60439-3: 1999

K5682s

100A SWITCH DISCONNECTOR AND 63A 30mA RCD. ACCEPTS A FURTHER 8 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED & UNPROTECTED CIRCUITS BETWEEN 1/6 AND 6/1

K5662s

100A SWITCH DISCONNECTOR AND 80A 30mA RCD. ACCEPTS A FURTHER 8 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED & UNPROTECTED CIRCUITS BETWEEN 1/6 AND 6/1

K5666s

100A SWITCH DISCONNECTOR AND 63A 30mA RCD. ACCEPTS A FURTHER 12 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED & UNPROTECTED CIRCUITS BETWEEN 1/8 AND 8/1

All units are magnolia coloured.

All units are pre-fitted with a switch disconnecter and RCD together with all necessary split load cabling. The flexibility of design allows the RCD to be positioned to suit the required configuration of RCD protected and non-protected circuits, subject to the rating of either the switch or RCD not being exceeded. MK recommends the use of RCBOs for non RCD protected circuits to comply with the 17th Edition of the Wiring Regulations.

K5686s

100A SWITCH DISCONNECTOR AND 80A 30mA RCD. ACCEPTS A FURTHER 12 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED & UNPROTECTED CIRCUITS BETWEEN 1/8 AND 8/1

K5681s

100A SWITCH DISCONNECTOR AND 80A 30mA RCD. ACCEPTS A FURTHER 17 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED & UNPROTECTED CIRCUITS BETWEEN 14/1 AND 1/14

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5682s:	306	x 230	x 110mm
K5662s:	306	x 230	x 110mm
K5666s:	378	x 230	x 110mm
K5686s:	378	x 230	x 110mm
K5681s:	468	x 230	x 110mm

Degree of protection to BS EN 60529:1992 IP2XC

Precautions must be taken to maintain the IP rating. eg. correct use of cable glands and knockouts

BS EN 60439-3: 1999

FACTORY BUILT SERVICE

MK can save you time and money by pre-assembling Consumer units with your required Sentry components

Cover mounted blanks are supplied with ALL consumer units (2 off x 1 for 4, 8 and 12 module and 2 off x 2 for 16 and 21 module)



WITH SPLIT LOAD
DUAL/TRIPLE RCD
ARRANGEMENT
METAL
SURFACE



K5566s MAG 17ED



K5586s MAG 17ED



K5581s MAG 17ED



K5583s MAG 17ED



K5584s MAG 17ED

WITH SPLIT LOAD
DUAL/TRIPLE RCD
ARRANGEMENT
INSULATED
SURFACE



K5666s MAG 17ED



K5686s MAG 17ED



K5681s MAG 17ED



K5683s MAG 17ED



K5684s MAG 17ED

K5566s MAG 17ED ¹
100A SWITCH DISCONNECTOR AND 2 X 63A 30MA RCDS. ACCEPTS A FURTHER 10 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, UNPROTECTED - UP TO 2

K5586s MAG 17ED ¹
100A SWITCH DISCONNECTOR 80A AND 63A 30MA RCDS. ACCEPTS A FURTHER 10 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, UNPROTECTED - UP TO 2

All units are magnolia coloured. All units are pre-fitted with a switch disconnecter and either two or three RCDs together with all necessary split-load cabling. All units have the capacity to substitute Protected with Unprotected circuits for use with fridges, freezers, burglar alarms and other critical circuits. MK recommends the use of RCBOS for non RCD protected circuits to comply with the 17th Edition of the Wiring Regulations.

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5566s MAG 17ED:	378	x 230	x 110mm
K5586s MAG 17ED:	378	x 230	x 110mm
K5581s MAG 17ED:	468	x 230	x 110mm
K5583 MAG 17ED s:	468	x 230	x 110mm
K5584 MAG 17ED s:	468	x 230	x 110mm

K5581s MAG 17ED ¹
100A SWITCH DISCONNECTOR, 80A AND 63A 30MA RCDS. ACCEPTS A FURTHER 15 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 11, RCD 2 - UP TO 8, UNPROTECTED - UP TO 2

K5583s MAG 17ED ¹
100A SWITCH DISCONNECTOR AND 2 X 63A 30MA RCDS. ACCEPTS A FURTHER 15 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 11, RCD 2 - UP TO 8, UNPROTECTED - UP TO 2

K5584s MAG 17ED ¹
100A SWITCH DISCONNECTOR, 2 X 63A AND ONE 40A 30MA RCDS. ACCEPTS A FURTHER 13 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, RCD 3 - UP TO 3, UNPROTECTED - UP TO 2

Degree of Protection to
BS EN 60529 to IP2XC
Precautions must be taken to maintain the IP rating e.g. use of cable glands and knockouts
BS EN 60439-3: 1999

K5666s MAG 17ED ¹
100A SWITCH DISCONNECTOR AND 2 X 63A 30MA RCDS. ACCEPTS A FURTHER 10 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, UNPROTECTED - UP TO 2

K5686s MAG 17ED ¹
100A SWITCH DISCONNECTOR 80A AND 63A 30MA RCDS. ACCEPTS A FURTHER 10 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, UNPROTECTED - UP TO 2

All units are magnolia coloured. All units are pre-fitted with a switch disconnecter and either two or three RCDs together with all necessary split-load cabling. All units have the capacity to substitute Protected with Unprotected circuits for use with fridges, freezers, burglar alarms and other critical circuits. MK recommends the use of RCBOS for non RCD protected circuits to comply with the 17th Edition of the Wiring Regulations.

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
K5666s MAG 17ED:	378	x 230	x 110mm
K5686s MAG 17ED:	378	x 230	x 110mm
K5681s MAG 17ED:	468	x 230	x 110mm
K5683s MAG 17ED:	468	x 230	x 110mm
K5684s MAG 17ED:	468	x 230	x 110mm

K5681s MAG 17ED ¹
100A SWITCH DISCONNECTOR, 80A AND 63A 30MA RCDS. ACCEPTS A FURTHER 15 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 11, RCD 2 - UP TO 8, UNPROTECTED - UP TO 2


K5683s MAG 17ED ¹
100A SWITCH DISCONNECTOR AND 2 X 63A 30MA RCDS. ACCEPTS A FURTHER 15 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 11, RCD 2 - UP TO 8, UNPROTECTED - UP TO 2

K5684s MAG 17ED ¹
100A SWITCH DISCONNECTOR, TWO 63A AND ONE 40A 30MA RCDS. ACCEPTS A FURTHER 13 ONE MODULE PRODUCTS IN ANY CONFIGURATION OF RCD PROTECTED AND UNPROTECTED CIRCUITS ACROSS RCD 1 - UP TO 5, RCD 2 - UP TO 5, RCD 3 - UP TO 3, UNPROTECTED - UP TO 2


Degree of Protection to
BS EN 60529 to IP2XC
Precautions must be taken to maintain the IP rating e.g. use of cable glands and knockouts
BS EN 60439-3: 1999

Skeleton Units


FOR MOUNTING IN A
MANTEL/CLIFTON TYPE
ENCLOSURE



K6000s



K6001s



Both K6000s and K6001s are
supplied with a 2 piece cover

K6000s

INCLUDES 1 X 100A SWITCH DISCONNECTOR
ACCEPTS A FURTHER 12 ONE MODULE
PRODUCTS IN ANY CONFIGURATION OF RCD
PROTECTED AND UNPROTECTED CIRCUITS
BETWEEN 2/10 AND 10/2 (NOTE RCDS TAKE
TWO SPACES)
1 INTEGRAL NEUTRAL RAIL

K6001s

INCLUDES 1 X 100A SWITCH DISCONNECTOR
AND 1 X 63A 30MA RCD
ACCEPTS A FURTHER 10 ONE MODULE
PRODUCTS IN ANY CONFIGURATION OF RCD
PROTECTED AND UNPROTECTED CIRCUITS
BETWEEN 2/8 AND 8/2 (NOTE RCDS TAKE TWO
SPACES)

These units are suitable for use in
most Mantel and Clifton type
enclosures. Factory assembled units are
available for specific installations.

DIMENSIONS WITH COVER:

	WIDTH	HEIGHT	DEPTH
K6000s:	333 x	216 x	65mm
K6001s:	333 x	216 x	65mm

Degree of Protection to
BS EN 60529:1992 IP30

Precautions must be taken to maintain the
IP rating, eg. correct use of cable glands
and knockouts.

BS EN 60439-3:1999

Enclosures


IP65
WEATHERPROOF
ENCLOSURE



5702s



5704s



5502s



5504s

5604s

5702s

WEATHERPROOF
COMPLETE WITH NEUTRAL AND
EARTH TERMINAL BLOCK
ACCEPTS UP TO 4 MODULES

5704s

WEATHERPROOF
COMPLETE WITH NEUTRAL AND
EARTH TERMINAL BLOCK
ACCEPTS UP TO 8 MODULES

Typical applications for enclosures are
house extensions, garages and small
workshops. These enclosures will
accommodate two or four module Sentry
RCDs or a combination of Sentry modules,
excluding contactors and RCBOs.

DIMENSIONS:

	WIDTH	HEIGHT	DEPTH
5702S:	123 x	200 x	112mm
5704S:	195 x	200 x	112mm
5502S:	130 x	90 x	90mm
5504S:	188 x	121 x	74mm
5604S:	150 x	110 x	90mm

IP30 ENCLOSURE

Switch Disconnectors Double Pole

TWO MODULE



5500s



5560s

1

5500s

100A 230V

1

5560s

63A 230V

1

5502s

INSULATED COMPLETE WITH
MOUNTING RAIL, NEUTRAL
AND EARTH TERMINALS
TWO MODULE

1

5504s

METAL
WITH MOUNTING RAIL,
EARTH TERMINALS AND
MOULDED FRONT PLATE
FOUR MODULE

5604s

INSULATED
WITH MOUNTING RAIL,
TWO INTEGRAL BLANKING PLATES
AND TAMPER-PROOFING
COMPONENTS
FOUR MODULE

Degree of Protection to
BS EN 60529:1992

5702s: IP65

5704s: IP65

5502s: IP30

5504s: IP30

5604s: IP30

Precautions must be taken to maintain the
IP rating, eg. correct use of cable glands
and knockouts

IP65 enclosures to EN 60670

1

1

1

Suitable for installation in Sentry Consumer
Units and two or four module enclosures.
Accepts direct to busbar or cable-in / cable-
out connection. Category of duty: AC22A
for switching of resistive and inductive
loads.

Positive contact status indication in
accordance with 17th Edition IEE Wiring
Regulations
(537.2.2.2 and 537.3.2.2)

DIMENSIONS:
81 x 36 x 76mm

CABLE CAPACITY:
50mm²

BS EN 60947-3: 1999



MK Sentry MCBs, RCBOs & RCDs

MCBs Single Pole

TYPE B ONE MODULE



5903s



5906s



5920s



5940s



8703s



8706s



8720s



8732s



5910s



5916s



5945s



5950s



8710s



8716s



8740s



8750s

5903s
3A 230V

10

5906s
6A 230V

10

5910s
10A 230V

10

5916s
16A 230V

10

5920s
20A 230V

10

5932s
32A 230V

10

5940s
40A 230V

10

5945s
45A 230V

10

5950s
50A 230V

10

8703s
3A 230V

10

8706s
6A 230V

10

8710s
10A 230V

10

8716s
16A 230V

10

8720s
20A 230V

10

8732s
32A 230V

10

8740s
40A 230V

10

8750s
50A 230V

10

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Switch mid-trip position indicates fault.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
83 x 18 x 74mm

CABLE CAPACITY:
3, 6, 10, 16A: 35mm²

Short-circuit breaking capacity: 6kA

BS EN 60898: 2003

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Switch mid-trip position indicates fault.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
83 x 18 x 74mm

CABLE CAPACITY:
20, 32, 40, 50A: 35mm²

Short-circuit breaking capacity: 6kA

BS EN 60898: 2003

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Switch mid-trip position indicates fault.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
83 x 18 x 74mm

CABLE CAPACITY:
3, 6, 10, 16A: 35mm²

Short-circuit breaking capacity: 6kA

BS EN 60898: 2003

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Switch mid-trip position indicates fault.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
83 x 18 x 74mm

CABLE CAPACITY:
20, 32, 40, 50A: 35mm²

Short-circuit breaking capacity: 6kA

BS EN 60898: 2003

RCBOs With Solid Neutral Single Pole

TYPE B ONE MODULE



7932s



7933s



7934s



7935s



7936s



7937s



7938s



7939s

7932s
6A 230V
30mA
TRIPPING CURRENT

1

7933s
10A 230V
30mA
TRIPPING CURRENT

1

7934s
16A 230V
30mA
TRIPPING CURRENT

1

7935s
20A 230V
30mA TRIPPING CURRENT

1

7936s
32A 230V
30mA TRIPPING CURRENT

1

7937s
40A 230V
30mA TRIPPING CURRENT

1

7938s
45A 230V
30mA TRIPPING CURRENT

1

7939s
50A 230V
30mA TRIPPING CURRENT

1

Suitable for installation in Sentry Consumer Units.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
119 x 18 x 73mm

CABLE CAPACITY:
Live 25mm²,
Neutral 25mm²

Short circuit breaking capacity: 6kA

BS EN 61009-1

BS IEC61009-2-2

MK Sentry MCBs, RCBOs & RCDs

RCDs Double Pole

16 AMP
TWO MODULE



6016s



5716s

32 AMP
TWO MODULE



6032s



6730s

40 AMP
TWO MODULE



5740s

63 AMP
TWO MODULE



5760s



5860s

6016s
16A 110V
10mA TRIPPING CURRENT

1

6416s
16A 110V
30mA TRIPPING CURRENT

1

6316s
16A 230V
10mA TRIPPING CURRENT

1

5716s
16A 230V
30mA TRIPPING CURRENT

1

6032s
32A 110V
30mA TRIPPING CURRENT

1

6730s
32A 230V
30mA TRIPPING CURRENT

1

5740s
40A 230V
30mA TRIPPING CURRENT

1

1

5760s
63A 230V
30mA TRIPPING CURRENT

1

6160s
63A 230V
100mA TRIPPING CURRENT

1

1

5860s
63A 230V
300mA TRIPPING CURRENT

1

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
85 x 36 x 75mm

CABLE CAPACITY:
50mm²

BS EN 61008: 1995





RCDs Double Pole

80 AMP
TWO MODULE



5780s



5880s

5780s
80A 230V

1

30mA TRIPPING CURRENT

6180s
80A 230V
100mA TRIPPING CURRENT

1

5880s
80A 230V
300mA TRIPPING CURRENT

1

6080s
80A 110V
30mA TRIPPING CURRENT

1

100 AMP
TWO MODULE



7700s



6600s

7700s
100A 230V
30mA TRIPPING CURRENT

1

6600s
100A 230V
100mA TRIPPING CURRENT

1

7800s
100A 230V
300mA TRIPPING CURRENT

1

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

Dimension
85 x 36 x 75mm

CABLE CAPACITY:
50mm²

BS EN 61008:1995

RCDs Pulsating D.C. Fault Current Sensitive Double Pole

TWO MODULE



6216s



6716s



5640s



6630s



5660s

6216s
16A 230V
10mA TRIPPING CURRENT

1

6716s
16A 230V
30mA TRIPPING CURRENT

1

6630s
32A 230V
30mA TRIPPING CURRENT

1

5640s
40A 230V
30mA TRIPPING CURRENT

1

5660s
63A 230V
30mA TRIPPING CURRENT

1

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
85 x 36 x 75mm

CABLE CAPACITY:
50mm²

BS EN 61008:1995

RCDs Time Delayed Double Pole

TWO MODULE



6980s



6400s

6980s
80A 230V
100mA TRIPPING CURRENT
TIME DELAYED

1

6400s
100A 230V
100mA TRIPPING CURRENT
TIME DELAYED

1

**NOT TO BE USED FOR
PERSONAL PROTECTION
AGAINST ELECTRIC SHOCK**

Suitable for installation in Sentry Consumer Units and Four Module enclosures. When used as a mains incomer these units will provide discrimination with downstream instantaneously operating 10mA or 30 mA RCD's. For example, they can be used as main incomers on split load consumer units where it is not desirable, because of the possibility of unwanted tripping, to place all of the circuits on an instantaneous 30mA RCD, but where earth leakage protection is still required for these circuits or where compliance is required to the indirect contact protection requirements of the IEE wiring regulations.

DIMENSIONS: 81 x 36 x 76mm

CABLE CAPACITY: 50mm²

BS EN 61008:1995

FACTORY BUILT SERVICE

MK can save you time and money by pre-assembling Consumer units with your required Sentry components

MK Sentry MCBs, RCBOs & RCDs

RCDs
Four Pole

RCD Pulsating D.C.
Fault Current
Sensitive
Four Pole

25 AMP
FOUR MODULE

40 AMP
FOUR MODULE

63 AMP
FOUR MODULE

FOUR MODULE



6425s



6440s



6463s



6640s



6240s



6363s

6425s
25A 230/400V
30mA TRIPPING CURRENT

1

Suitable for installation in Sentry four module enclosures and Commando Combi.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
85 x 72 x 75mm

CABLE CAPACITY:
50mm²

BS EN 61008:1995

6440s
40A 230/400V
30mA TRIPPING CURRENT

6240s
40A 230/400V
100mA TRIPPING CURRENT

1

6463s
63A 230/400V
30mA TRIPPING CURRENT

1

6363s
63A 230/400V
100mA TRIPPING CURRENT

6263s
63A 230/400V
300mA TRIPPING CURRENT

1

6640s
40A 230/400V
30mA TRIPPING CURRENT

1

1



Suitable for installation in Sentry two or four module enclosures.

Positive contact status indication in accordance with 17th Edition IEE Wiring Regulations (537.2.2.2 and 537.3.2.2)

DIMENSIONS:
85 x 72 x 75mm

CABLE CAPACITY:
50mm²

BS EN 61008: 1995



Contactors

ONE MODULE



6220s



6720s

6220s
20A
DOUBLE POLE

6720s
20A
DOUBLE POLE
WITH MANUAL OVERRIDE

TWO MODULE



7240s



7263s

6420s
20A
FOUR POLE

7240s
40A
DOUBLE POLE

7263s
63A
DOUBLE POLE

THREE MODULE



7440s



7463s

7440s
40A
FOUR POLE

7463s
63A
FOUR POLE

Bell Transformer

TWO MODULE



5711s

5711s
RATING 1A AT 8V
PRIMARY
220 – 240V A.C.50Hz

Suitable for installation in Sentry Consumer Units and two or four module enclosures. Automatically switches higher loads than possible with a time switch eg; off peak tariffs.

A manual override enables the temporary setting of the contactor in either the on or off position in addition to normal automatic operation.

When a contactor is mounted alongside an MCB of greater than 10 amp current rating or two contactors are mounted alongside an MCB or side by side, it is necessary to insert a blank module between them (list no.5544s)

CONTACTOR RATINGS:

List no	6220s 6420s 6720s	7240s 7440s	7263s 7463s
RATED CURRENT Ith	20A	40A	63A
HEATING: Single phase 230V Three phase 400V	5.4kW 16kW	8.6kW 26kW	13.6kW 41kW
MOTORS: Single phase 230V Three phase 400V	1.1kW 4kW	2.2kW 7.5kW	4kW 11kW
LIGHTING: Incandescent and Halogen lamps: Fluorescent Lamps: (Electronic Ballast)	2,800W 2,000W	7,000W 4,200W	10,000W 6,300W
VOLTAGE RATING: (coil)	230V 50Hz	230V 50Hz	230V 50Hz
CABLE CAPACITY: rigid BS EN 61095	6mm ² rigid	25mm ² rigid	25mm ²

DIMENSIONS:

6220s: 84 x 18 x 66mm
6420s: 84 x 36 x 66mm
6720s: 84 x 18 x 66mm
7240s: 84 x 36 x 66mm
7263s: 84 x 36 x 66mm
7440s: 84 x 54 x 66mm
7463s: 84 x 54 x 66mm
(including half module blank)

Suitable for installation in Sentry Consumer Units and two or four module enclosures.

Note: When installed in a consumer unit, ensure that output cables inside the enclosures are suitable for a 230V environment, either by sleeving the bell wire to BS 2848 or using 230V cable.

Complete with terminal covers. Also suitable for surface mounting.

DIMENSIONS:
88 x 36 x 67mm
CABLE CAPACITY:
1 x 2.5mm²
EN 61558-2-8

Time Switches

SYNCHRONOUS THREE MODULE



5707s



5724s

QUARTZ STABILISED THREE MODULE



5824s

SYNCHRONOUS ONE MODULE



5833s

DIGITAL ONE CHANNEL TWO MODULE



5731s

DIGITAL ONE CHANNEL ONE MODULE



5733s

DIGITAL TWO CHANNEL TWO MODULE



5732s

5707s ¹
7 DAY DIAL
MIN SETTING 3 HOURS

5724s ¹
24 HOUR DIAL
MIN SETTING 30 MINUTES

Suitable for DIN rail mounting in Sentry Consumer Units or four module enclosures.

VOLTAGE RATING:
220-240Va.c. 50Hz

CURRENT RATING:
Resistive load 16A
Inductive load 4A
Tungsten lamps 6A
(1350W)
Fluorescent lamps 1350W

DIMENSIONS:
85 x 54 x 68mm

CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

5824s ¹
24 HOUR DIAL
MIN SETTING 30 MINUTES

Suitable for DIN rail mounting in Sentry Consumer Units and two or four module enclosures.
Power reserve 150 hours

VOLTAGE RATING:
220-240Va.c. 50-60Hz

CURRENT RATING:
Resistive load 16A
Inductive load 4A
Tungsten lamps 6A
(1350W)
Fluorescent lamps 1350W

DIMENSIONS:
85 x 54 x 68mm

CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

EN 60730-2-7: 1993

5833s ¹
24 HOUR DIAL
MIN SETTING 30 MINUTES

Suitable for DIN rail mounting in Sentry Consumer Units and two or four module enclosures

VOLTAGE RATING:
240V 50Hz

CURRENT RATING:
Resistive load 16A
Inductive load 4A
Tungsten lamps 6A
(1350W)
Fluorescent lamps 1350W

DIMENSIONS:
90 x 18 x 68mm

CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

EN 60730-2-7: 1993

5731s ¹
24 HOUR/7 DAY DISPLAY
MIN SETTING 1 MINUTE

Pre-programmed with UK time and automatic summer/winter adjustment.

Provides 20 programming selections. Freely selectable day grouping facility.
Manual override, winter/summer time adjustment.

Power reserve of 3 years.
Suitable for DIN-rail mounting in Sentry Consumer Units and two or four module enclosures.

VOLTAGE RATING:
240V 50/60Hz

CURRENT RATING:
Resistive load 16A
Inductive load 2.5A
Tungsten lamps 5A
(1000W)
Fluorescent lamps 1000W

DIMENSIONS:
85 x 36 x 68mm

CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

EN 60730-2-7: 1993

5733s ¹
24 HOUR DIAL
MIN SETTING 1 MINUTE

Provides 42 programming selections. Freely selectable day grouping facility.
Manual override, winter/summer time adjustment, holiday programme and random generator are standard facilities.

Power reserve of 150 hours.

Suitable for DIN rail mounting in Sentry Consumer Units and two or four module enclosures

VOLTAGE RATING:
240V 50/60Hz

CURRENT RATING:
Resistive load 16A
Inductive load 2.5A
Tungsten lamps 5A
(1000W)
Fluorescent lamps 1000W

DIMENSIONS:
90 x 18 x 74mm

CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

EN 60730-2-7: 1993

5732s ¹
24 HOUR/7 DAY DISPLAY
MIN SETTING 1 MINUTE

Pre-programmed with UK time and automatic summer/winter adjustment.

Provides 30 programming selections. Freely selectable day grouping facility.
Manual override, winter/summer time adjustment.

Power reserve of 3 years.
Suitable for DIN-rail mounting in Sentry Consumer Units and two or four module enclosures.

VOLTAGE RATING:
240V 50/60Hz

CURRENT RATING:
Resistive load 16A
Inductive load 2.5A
Tungsten lamps 5A
(1000W)
Fluorescent lamps 1000W

DIMENSIONS:
85 x 36 x 68mm


CABLE CAPACITY:
2 x 2.5mm² or 4 x 1.5mm²

EN 60730-2-7: 1993



Consumer Unit Cable Kits

Accessories



K5563s



K5565s




5562s



K8041s



K5593s



5544s




K5545s




K5511s



KAX26s



K5597s



K5599s

K5563s new 'K' series
SPLIT-LOAD KIT
Consists of 3 cables (2 neutral and 1 live) for use when assembling a split load arrangement.

5

K5565s new 'K' series
MULTI-INCOMER KIT
Consists of a blue flexible cable with pre-fitted terminal for the neutral return from switch or RCD to second or third neutral bar.

5

K5568s new 17th Edition
17th Edition cable kit for switch and twin RCD arrangement

5

K5567s new 17th Edition
A&D cable kit for switch plus triple RCD arrangement

5

K5563s
For use when assembling split-load arrangement.

K5564s
For use when assembling a switch and twin RCD arrangement.

K5565s
For use when assembling a consumer unit in a multi-incomer arrangement with separate supply to each incomer.

These kits must be used to ensure compliance with BS EN 60439-3

5562s
EXTENSION
TERMINAL
For use when assembling a consumer unit as a distribution board. Enables direct connection of cables to the neutral bar. Consists of a 25mm² capacity terminal with clamp screw.

K8041s
LOCKING DEVICE
For use when locking a Sentry MCB, RCBO, RCD or switch disconnector in either the on or off position.

K5593s
BARREL LOCK AND KEY KIT
Suitable for securing 'K' series Sentry Consumer Unit lids.

1

5544s
MCB BLANK – GREY
Designed to fill unused modules in Sentry Consumer Units and small enclosures. DIN-rail mounted.

1

K5545s
COVER MOUNTED BLANK
For filling spaces in the 'K' series Sentry consumer unit cover, where there are unused modules.

10

K5511s new 'K' series
BUSBAR
11 module.

1

K5590s new 'K' series
BUSBAR
20 module.

1

KAX26s new 'K' series
BUSBAR COVER
Suitable for insulating the busbars K5511s and K5590s 20 module.

10

K5597s
CONSUMER UNIT LABELS
Additional printed and blank labels, for identifying devices and circuits on Dual & Triple RCD boards

5

K5599s
CONSUMER UNIT LABELS
Additional printed and blank labels, for identifying devices and circuits on single RCD boards.

5



MK Electric

Tech Helpline Tel 01268 563720

Web www.mkelectric.co.uk

UK The Arnold Centre Paycocke Road Basildon Essex SS14 3EA United Kingdom

Customer Service Tel 01268 563404

Customer Service Fax 01268 563405

E-mail mkorderenquiries@honeywell.com

Ireland Unit 55 Park West Industrial Park Nangor Road Dublin 12 Republic of Ireland

Customer Service Tel +353 (0)1429 6500

Customer Service Fax +353 (0)1429 6501

E-mail ireland.sales@honeywell.com
